


Sechskantschutzkappen

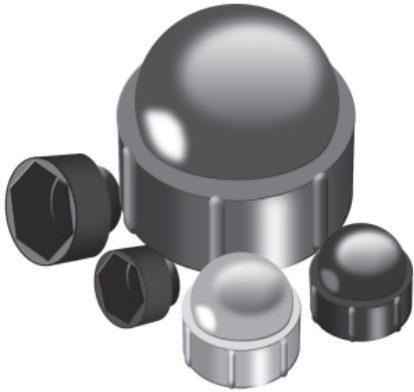

Material: PE


In schwarz ab Lager lieferbar

grau und weiß auf Anfrage

Art. Nr.	Schlüsselweite	Gewinde
SKS4	7	M4
SKS5	8	M5
SKS6	10	M6
SKS8	13	M8
SKS10	17	M10
SKS12	19	M12
SKS14	22	M14
SKS16	24	M16
SKS18	27	M18
SKS20	30	M20

Art. Nr.	Schlüsselweite	Gewinde
SKS22	32	M22
SKS24	36	M24
SKS27	42	M27
SKS30	46	M30
SKS33	50	M33
SKS36	55	M36
SKS39	60	M39
SKS42	65	M42
SKS45	70	M45

Laborstopfen



Naturkautschuk NK, grau

Härte: ca. 40° - 50° Shore

Temperaturbeständigkeit: -30 °C bis + 80 °C

Auch lieferbar in Qualität Silikon für

Dauertemperatur von 220 °C

Art. Nr.	ød	ød1	h
LS02-05	2	5	20
LS03-07	3	7	20
LS3,5-6,5	3,5	6,5	15
LS04-08	4	8	20
LS05-09	5	9	20
LS06-10	6	10	20
LS08-12	8	12	20
LS09-13	9	13	20
LS11-15	11	15	20
LS12-17	12	17	25
LS12,5-16,5	12,5	16,5	20
LS14-18	14	18	20
LS16-21	16	21	25
LS17-23	17	23	30
LS19-24	19	24	25
LS22-27	22	27	25
LS25-31	25	31	30
LS28-34	28	34	30
LS31-38	31	38	35

Art. Nr.	ød	ød1	h
LS34-41	34	41	35
LS35-44	35	44	40
LS38-45	38	45	35
LS42-49	42	49	35
LS46-54	46	54	40
LS50-60	50	60	45
LS50-60/S	50	60	50
LS55-65	55	65	50
LS63-73	63	73	50
LS65-76	65	76	55
LS70-90	70	90	50
LS78-92	78	92	50
LS85-95	85	95	50
LS90-150	90	150	50
LS94-107	94	107	65
LS95-105	95	105	50
LS100-130	100	130	85
LS105-125	105	125	50